



# Model 1510 Specifications

## Stand-Alone Displays

### Features

The D1510 Series can be stand-alone or intergrated with a 2 or 3-digit intelligent LED display with infrared capabilities. This display has two inputs for buttons or logic controls and a communications link for communicating with other displays. Displays are powered by a 24-Volt AC adapter (included).




1510



5120XXCX



5130XXCX

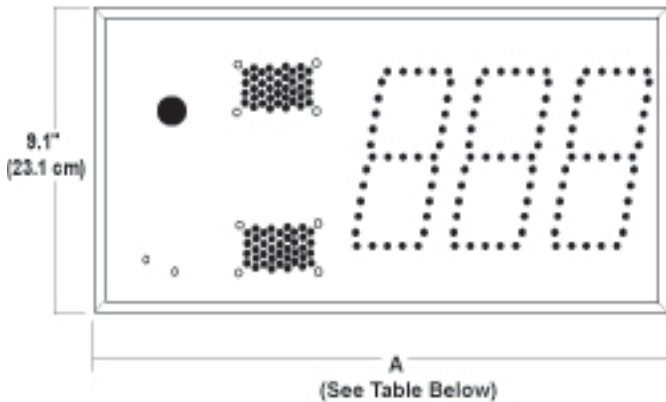

### Model 1510 Specifications

Voltage Input Requirements .....	24 volts AC or DC		
Character Height .....	5.5 Inches		
Character Viewing Distance .....	125 Feet		
Temp.....	-20°C to 60°C (-4°F to 140°F)		
Case .....	Aluminum Extrusion		
Color.....	Black Frame w/ Dark Red Plexiglas Faceplate		
Environment .....	Indoor Use Only		
Display Size.....	<b>Stand-Alone</b>	<b>2-Digit</b>	<b>3-Digit</b>
Power Requirements .....	9 Watts	10 Watts	11 Watts
Weight .....	2.75 lbs	4.1 lbs	4.25 lbs
Width "A" Dimension Inches.....	9.8"	17.73"	21.16"
Width "A" Dimension Centimeters.....	24.9 cm	45.04 cm	53.75 cm

Support and Sales  
**800-635-3811**  
 Microframe® Corporation  
[www.microframecorp.com](http://www.microframecorp.com)

P.O. Box 1700  
 Broken Arrow, OK 74013