

# microframe® DATAPAGE II w/DTMF SPECIFICATIONS

## On-Premise Paging

### Features


The DataPage II w/DTMF can send a 12-digit numeric message code to any of 9,999 different pagers. When used with the GEO 40 Alpha Pager, Microframe can program pre-defined alpha messages to enhance communication between the sender and receiver. Up to 874 total characters may be used, making it possible to program as many different messages as you want within that character limit. Every space counts as a character, as does every line. For example, you could pre-define 45 messages that are 2-5 words in length or 70 two-word messages. All pre-defined messages are programmed at the time of initial order.



**DataPage II w/DTMF Transmitter**

### Operation

A page can be transmitted from the transmitter or any phone within your PBX system to a single pager or a group of pagers. Up to a 12-digit numeric message may be sent using the Pocket Pagers. Using the GEO 40 pager, pre-defined alpha messages may be sent in addition to the ability to send a single numeric message.

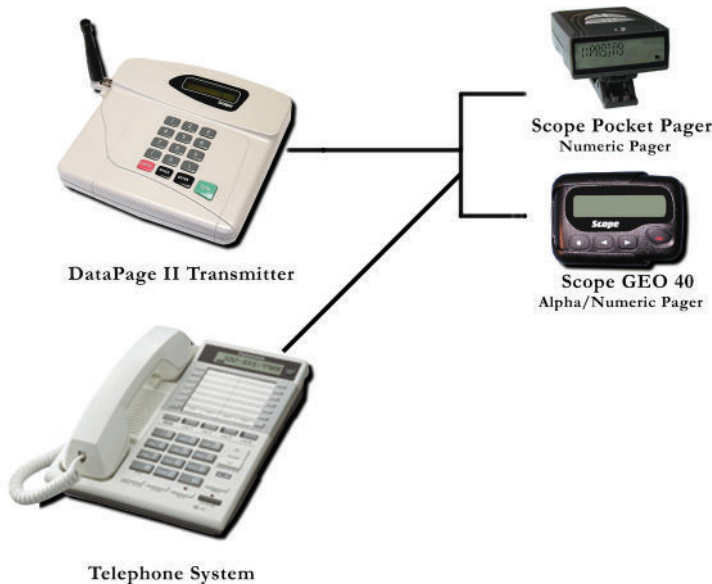

**Support and Sales**  
**800-635-3811**

Microframe® Corporation  
[www.microframecorp.com](http://www.microframecorp.com)

P.O. Box 1700  
 Broken Arrow, OK 74013

### DataPage II Specifications

Frequency Range .....	457.575 MHz
Distance Range .....	1/4 to 1/2 Mile
FCC Approval No.....	JRNUSASERILINK
Mounting.....	Desk Mounted