



# DATAPAGE II SPECIFICATIONS

## On-Premise Paging

### Features


The DataPage II Transmitter can send a 12-digit numeric message code to any of 9,999 different pagers. Upon request, Microframe can program up to three pre-defined alpha messages to enhance communication between the sender and receiver. This on-premise paging system offers unlimited paging with no monthly service fee. Optional Telephone Interface allows any internal phone to be used for paging. Optional computer interface allows messages to be sent from any network computer. May be set on a flat surface or installed on a mounting wedge for an angle or wall-mount.



**DataPage II Transmitter**

### Operation

The DataPage II is a simple plug and play system. Once the transmitter is plugged in and batteries are inserted into the pagers, the system is ready. A page is transmitted when the pager number or group number is entered using the number keys on the base. Pagers may be turned off from the base or individually.

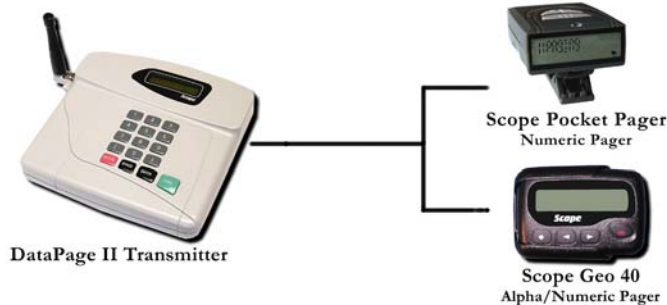

**Support and Sales**  
**800-635-3811**

Microframe® Corporation  
www.microframecorp.com

P.O. Box 1700  
Broken Arrow, OK 74013

### DataPage II Specifications

Frequency Range .....	457.575 MHz
Distance Range .....	1/4 to 1/2 Mile
FCC Approval No. ....	JRNUSASERILINK
Mounting .....	Desk Mounted